



"Give some bite to your engine!"


COBRA HYDRAULICS



Cobra HYDRAULICS are designed for various hydraulic systems and applications. This oil is formulated to offer a wide operating temperature range.

Cobra HYDRAULICS are designed for use in colder temperatures.

Cobra HYDRAULICS are NOT recommended for use with pumps that contain silver-plated parts.

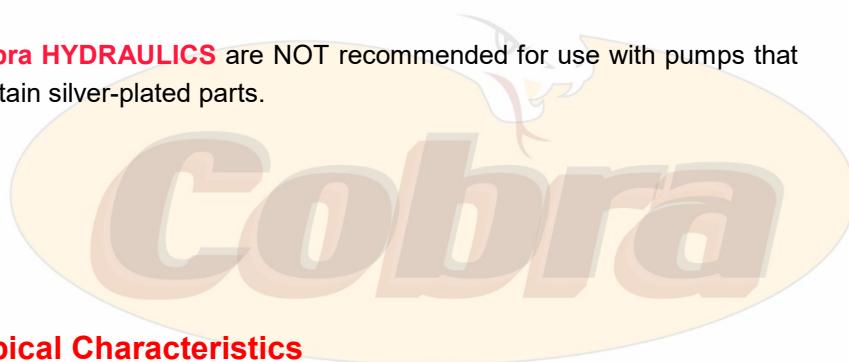

Typical Characteristics

ISO GRADE	22	32	46	68
DENSITY @ 15°C (ASTM D4052) kg/L	0.85	0.85	0.86	0.86
VISCOSITY (D445) cSt @ 40°C cSt @ 100°C	21.9 4.5	32.3 5.7	46.0 7.3	68.0 9.3
VISCOSITY INDEX (D2270)	119	117	121	114
FLASH POINT (D93) (°C) PMCC	202	219	221	230
POUR POINT (°C) (D97)	-50	-41	-43	-40
TOST (Hrs.) (D943)	4000+	4000+	4000+	4000+

Size and Order Codes

GRADE	18.9L PAIL	205L Drum	1000L Tote	BULK
COBRA Hydraulic 22	FBB0012240	-	-	BB0012201
COBRA Hydraulic 32	FBB0011740	FBB0011750	FBB0011760	BB0011701
COBRA Hydraulic 46	FBB0011840	-	-	BB0011801
COBRA Hydraulic 68	FBB0011940	-	-	BB0011901

Please visit www.cobralubricants.com for more information.

Supporting data available to demonstrate acceptable performance. Check with your account representative for the latest product approvals. Note, these are typical performance indicators and can change without notice. This data sheet supersedes any previous version prior to 09/21/2018.